



Computerized HDPE Water Supply Pipe Extrusion Production Line SJ 90 for 315 630 mm

Our Product Introduction

for more products please visit us on plasticextrudersmachine.com

Basic Information

- Place of Origin: Shandong, China
- Brand Name: Changyue
- Packaging Details: Export Film Packing / According To Customer
- Delivery Time: 15 Days (1 - 1 Pieces) To Be Negotiated (> 1 Pieces)



Product Specification

- Model NO.: SJ 90
- Customized: Customized
- Condition: New
- After-sales Service: Site Installation
- Finished Product: HDPE Pipe
- Pipe Diameter: 315-630 Mm
- Extruder Size: Sj 90/38
- Motor Power: 220 Kw
- Transport Package: Export Package
- Specification: 315 - 630 Mm
- Trademark: CHANGYUE
- Origin: Qingdao, China
- HS Code: 84772090
- Supply Ability: 300 Kg / H
- Warranty: One Year



More Images



Product Description

Product Description

HDPE water supply pipe extrusion production line 315 - 630 mm HDPE pipe extrusion production line

The PE pipe extrusion line is developed on based of European advanced technology. It is suitable for producing PE,PP,PERT pipes at high speed production. The production line has a high degree of automation, optimized screw structure, stable production efficiency and won good reputation both in domestic and oversea markets. For producing large diameter pipes, we can also provide two-layer, three-layer and multi-layer composite pipe extrusion line. It is the best alternative to replace the imported production line. Based on the market demand, We have developed and manufactured larger HDPE pipe extrusion line with diameter up to 1600mm.

Features:


1. New type screw with L/D 38:1. Capacity has been increased largely
2. The complete line adopts advanced PLC control system, realizing synchronization and full-automation
3. New type high torque gearbox realizes much more stable production
4. Vacuum calibration tank and cooling tank adopt automatic water temperature and water level control as well as special independent filters.

Product Parameters

Main technical parameters

Model	Pipe rang	Extruder model	Main motor power /kw	Max.capacity kg
CY-63	φ16-63	SJ-60/38	110	350-400
CY-110	φ20-110	SJ-60/38	110	350-400
CY-160	φ40-160	SJ-60/38	110	350-400
CY-250	φ50-250	SJ-75/38	160	500-550
CY-400	φ160-450	SJ-90/38	220	700-800
CY-630	φ250-630	SJ-120/38	2355	1100-1200
CY-800	φ315-800	SJ-120/38	355	1100-1200
CY-1200	φ500-1200	SJ-150/38	450	1400-1500
CY-1600	φ710-1600	SJ-150/38	450	1400-1500

Detailed Photos

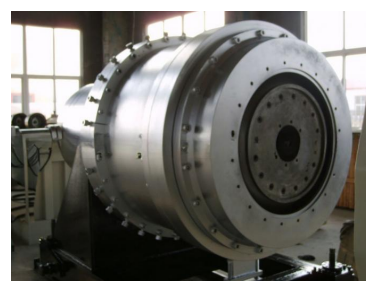

Certifications



After Sales

Service

1. After the machines are finished, the seller will test all machines before shipment. If the buyer can not come to test the machine, we will test the machines and send the sample to buyer.
2. After shipment, the seller will send one or two technicians to the buyer's factory to help the buyer install the machine and train workers for buyer.
3. We will supply all electricity drawing, machine installation drawing.
4. When make shipment, we will put some spare electricity parts for free, like the barrel heaters, thermocouples, breakers, relays, and other items which is easier broken.



Qingdao Changyue Plastic Machinery Co., Ltd.



0086 13705428176



edward@hualideplast.com



plasticextrudersmachine.com

SOUTH LONGYI ROAD, NO.2 JIAOXI INDUSTRIAL ZONE, JIAOZHOU CITY, QINGDAO, CHINA