



Computerized 65/132 Water Drainage PVC Pipe Production Line for Precise Manufacturing

Basic Information

. Place of Origin: Shandong, China Brand Name: Changyue

· Certification: CE, ISO9001:2008

 Packaging Details: Export Film Packing / According To

Customer

• Delivery Time: 15 Days (1 - 1 Pieces) To Be Negotiated (>

1 Pieces)



Product Specification


65/132 Model NO.: Automation: Automatic . Computerized: Computerized Customized Customized:

· Condition: New


• After-sales Service: Site Installation • Transport Package: **Export Package** Specification: 50-160 Mm Trademark: **CHANGYUE** • Origin: Qingdao, China 84772090 HS Code: 200 -300 Kg/H . Supply Ability: Warranty: One Year Product Type: **PVC** Pipe Screw No.: Double-screw



More Images









Product Description

PVC pipe extrusion machine / extrusion line

turnkey PVC pipe extrusion production line

turnkey PVC pipe extrusion production line

complete PVC pipe extrusion production line extrusion line for pvc water supply pipe

China best PVC pipe extrusion production line full automatic PVC pipe production line UPVC drainage pipe extrusion line automatic pvc pipe extrusion machine/production line good quality UPVC pipe extrusion machine / production line

We supply turnkey PVC pipe extrusion project, include hot cold mixer, extrusion machine, belling machine, laser printer, slotting machine, threading machine

Main Features:

Specified screw design for better material plasticizing&mixing effect and lower cost formula.

Higher density and stronger mechanical properties of the pipe as a result of large compression ratio of mold design. More stable and reliable hauling, no deformation, multi-caterpillar structure of haul-off unit, suitable for different size range. Planetary cutting with chambering function for stable&reliable cutting and precise length-counting.

machine component:

- 1. material auto loader
- 2. SJSZ65/132 twin conical screw extruder
- 3. mould
- 4. vacuum water tank
- 5. haul off
- 6. cutter
- 7. stacker

Main technical parameters


Model	Pipe range/mn	Capacity kg/h	Maximum linear velocity (m/min)	Main motor power /kv	v Total length/m
SJSZ-65/132	250-110	120-250	6	37	22
SJSZ-80/156	6110-250	250-400	5	75	23
SJSZ-92/188	3315-630	400-700	1.5	110	32


PVC Double-Pipe Production Line


Model	Pipe Diamete	erOutput	Speed	MotorTotal Length	
SJSZ-65/13250-75mm		250-350 kg/h	6m/min*2	30kw 22m	


SJSZ-80/15650-110mm 500-750kg/h 8m/min*2 55kw 23m



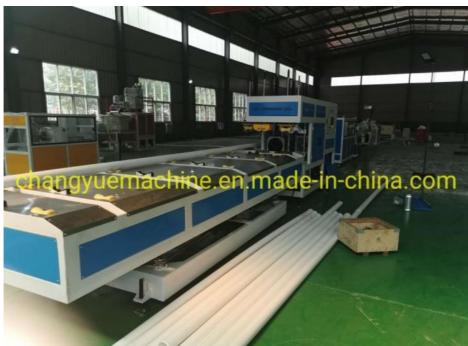

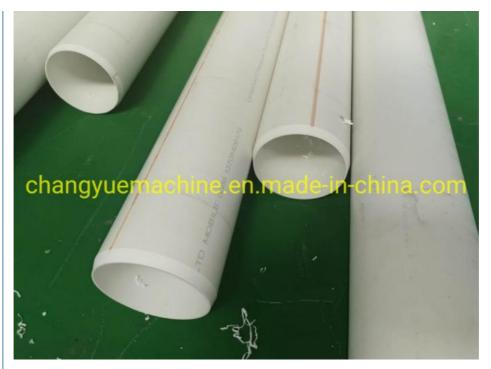

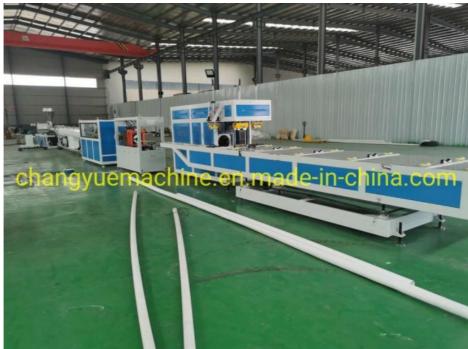

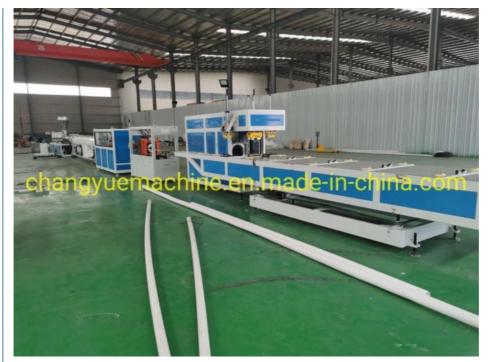










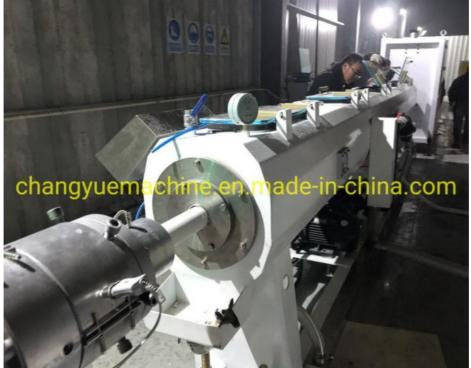

Cingdao Changyue Plastic Machinery Co., Ltd.





